itC

T-206CW Ceiling Speaker(3.8W-7.5W-15W-30W)

Features

- Built-in 100v/70v transformer
- In-ceiling type loudspeaker
- 6" +1.5" coaxial speaker unit
- Power output 3.8W, 7.5W, 15W & 30W @100V
- Line input: 100V, 70V or 8 Ω
- Metal grille, ABS baffle & metal back cover
- Paint in white color
- Secure flush mount installation

Description

The T-206CW is a ceiling speaker built-in 70v/100v transformer. The 70v/100v transformer technique reduces line losses on longer distance and allows easy parallel connection of multiple loudspeakers.



The built-in 6"+1.5" coaxial speaker driver is designed of wide frequency response 100-20kHz, and its various power output from 3.8W, 7.5W, 15W & 30W could meet different room size applications. The power taps is convenient to switch the input from 100V to 70V or 8 Ω , thus this speaker support both high impedance input and low impedance input use. The metal grille, ABS baffle and metal back cover are painted in attractive white color. Its flush mount type makes the easy and secure installation.

It is ideal choice for industrial and commercial applications in hotel, school, office and factory where background music and paging is needed.


Specification

Model	T-206CW
Power Taps @100V	3.8W, 7.5W, 15W, 30W
Power Taps @70V	1.9W, 3.8W, 7.5W, 15W, 30W
Transformer Impedance	Black: Com Red: 2.6KΩ/1.3KΩ/670Ω/330Ω/165Ω
Input	70V/100V/8Ω
SPL(1W/1M)	89dB±3dB
Max. SPL (Rated W/1M)	104dB
Frequency Response (-10dB)	100-20KHz
Finish	Baffle: ABS, White Cover, Grille: Steel, White
Speaker Driver	6" x 1 1.5" x 1
Cutout Size	208mm
Dimensions	241 x 165mm
Weight	1.6Kg
Mounting	Flush-mount dog ears


itC

T-206CW Ceiling Speaker(3.8W-7.5W-15W-30W)

Appearance:

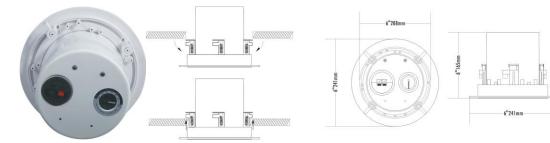

Direction Diagram:

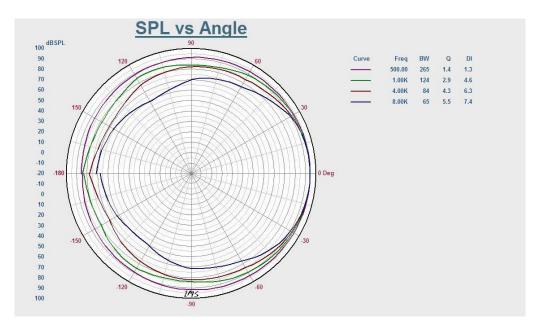

Frequency Response:

