


# T-208BC Ceiling Speaker(1.87W-3.75W-7.5W-15W)

#### **Features**

- Built-in 100v/70v transformer
- Good sound quality speaker for music & speech
- In-ceiling type loudspeaker
- 8" dual cone paper speaker unit
- Power taps1.87W, 3.75W, 7.5W & 15W @100V
- Metal grille & ABS baffle
- Paint in white color
- Flush mount easy & secure installation



The T-208BC is a ceiling speaker built-in 70v/100v transformer. The 70v/100v transformer technique reduces line losses on longer distance and allows easy parallel connection of multiple loudspeakers.

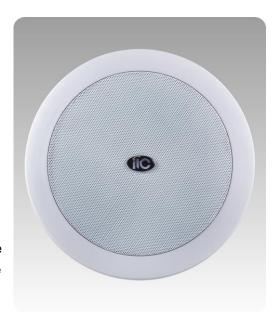

The built-in 8" dual cone paper speaker driver is designed of wide frequency response 80-20kHz, the multiple power taps 1.87W, 3.75W, 7.5W & 15W are helpful for different applications varies from room size and ambient noise surroundings. The metal grille and ABS baffle are painted in attractive white color. Its flush mount type makes the easy and secure installation.

It is ideal choice for industrial and commercial applications in hotel, school, office and factory where background music and paging is needed.

### **Specification**

Model	T-208BC
Power Taps @100V	1.87W, 3.75W, 7.5W, 15W
Power Taps @70V	0.93W, 1.87W, 3.75W, 7.5W
Impedance	Black: Com Blue:5.3KΩ Red:2.6KΩ Green:1.3KΩ White:670Ω
SPL(1W/1M)	90dB
Max. SPL (Rated W/1M)	102dB
Frequency Response (-10dB)	80-20KHz
Finish	Baffle: ABS, White Grille: Steel, White
Speaker Driver	8" x 1
Cutout Size	245mm
Dimensions	280 x 80mm
Weight	1.4Kg
Mounting	Flush-mount dog ears


Website: www.itc-pa.com.cn; Mail: info@itc-pa.com.cn




# **T-208BC** Ceiling Speaker(1.87W-3.75W-7.5W-15W)

### Appearance:



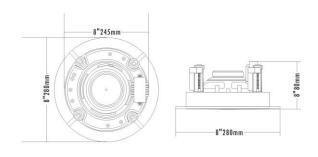

### **Direction Diagram:**

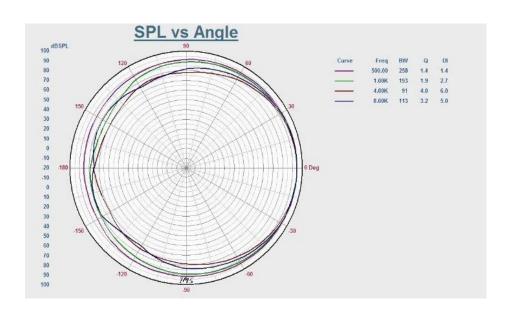

## Frequency Response:

